

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
6 June 2002 (06.06.2002)

PCT

(10) International Publication Number  
WO 02/45274 A2

(51) International Patent Classification<sup>7</sup>: H04B

(21) International Application Number: PCT/IB01/02189

(22) International Filing Date:  
20 November 2001 (20.11.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/250,242 30 November 2000 (30.11.2000) US  
09/751,640 29 December 2000 (29.12.2000) US  
09/901,988 10 July 2001 (10.07.2001) US

(71) Applicant: NOKIA CORPORATION [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).

(71) Applicant (for LC only): NOKIA INC. [US/US]; 6000 Connection Drive, Irving, TX 75039 (US).

(72) Inventor: TANG, Clive; Apartment 2238, 145 Cimarron Trail, Irving, TX 75063 (US).

(74) Agents: KELLY, Robert, H. et al.; Novakov Davis & Munck, P.C., 900 Three Galleria Tower, 13155 Noel Road, Dallas, TX 75240 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

[Continued on next page]

(54) Title: APPARATUS, AND ASSOCIATED METHOD, FOR SELECTING A SWITCHING THRESHOLD FOR A TRANSMITTER UTILIZING ADAPTIVE MODULATION TECHNIQUES

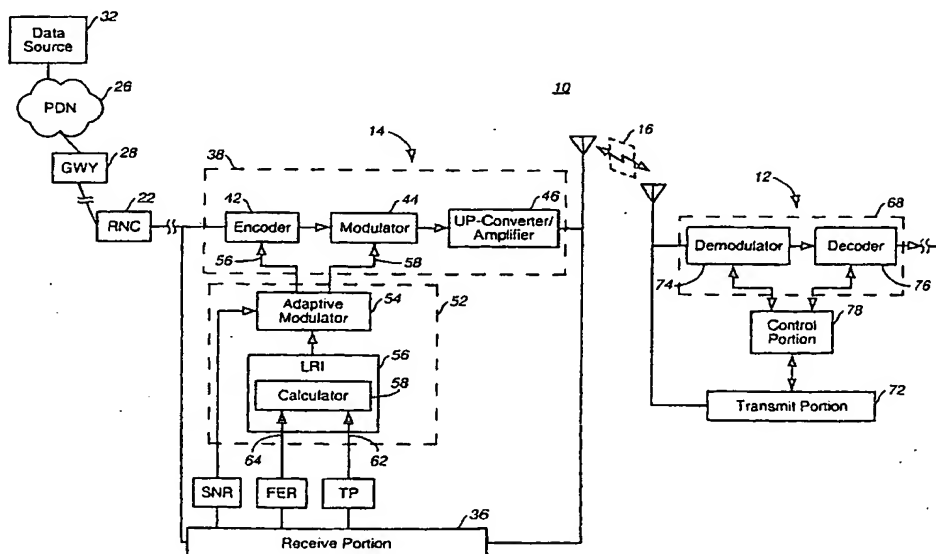

(57) Abstract: Apparatus (52), and an associated method selects an adaptive switching threshold level responsive to a constrained optimization scheme. The switching level is selected by an LRI function (56) forming a portion of a transmitting station (14), such as a base transceiver station (14) operable in a cellular communication system (10). The switching threshold level is utilized in the selection by an adaptive modulator (54) of a modulation parameter by which data transmitted by the transmitting station (14) is encoded or modulated.

WO 02/45274 A2



*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

APPARATUS, AND ASSOCIATED METHOD, FOR  
SELECTING A SWITCHING THRESHOLD FOR A  
TRANSMITTER UTILIZING ADAPTIVE MODULATION TECHNIQUES

5 CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a Continuation-in-Part to co-  
pending United States Application Number 09/751,640,  
filed on December 29, 2000, and claims benefit of  
Provisional Application Serial Number 60/250,242, filed  
10 on November 30, 2000, assigned to assignee of present  
application and incorporated herein by reference.

The present invention relates generally to a manner  
by which to select a modulation parameter at a sending  
station, such as the transmit portion of a base  
15 transceiver station or mobile station operable in a  
cellular communication system, which uses adaptive  
modulation techniques. More particularly, the present  
invention relates to apparatus, and an associated method,  
for dynamically selecting a switching threshold used in  
20 the selection of the modulation parameter. The switching  
threshold is selected responsive to a constrained  
optimization scheme in which two, or more, communication  
characteristics defining performance criteria are used in  
the selection of the switching threshold. Selection is  
25 made, for example, to optimize one of the communication  
characteristics while also ensuring that at least one  
additional communication characteristic is at least  
fulfilled, i.e., of an acceptable level. By dynamically  
selecting the switching threshold upon two or more  
30 performance criteria, improved quality levels of  
communication are possible as additional performance  
criteria are used in the selection of the switching  
threshold and, hence, determination of the modulation  
parameter which is used.

## BACKGROUND OF THE INVENTION

The use of wireless communication systems through which to communicate has achieved wide popularity in recent years. In a wireless communication system, a radio link is utilized upon which to form a communication path between a sending station and a receiving station. In contrast to a conventional, wireline communication system which requires fixed, wired connections to be maintained between the sending and receiving stations, use of a wireless communication system inherently permits increased mobility of communication. Additionally, infrastructure costs associated with a wireless communication system are generally less than the corresponding costs associated with the infrastructure of a conventional, wireline communication system. Installation of a wireless communication system is therefore generally less costly than the costs associated with installation of a wireline communication system.

Multi-user, wireless communication systems permit relatively large numbers of users simultaneously to communicate by way of such systems. A cellular communication system is exemplary of a wireless, multi-user, radio communication system which has been installed over significant geographical areas and which has achieved wide levels of usage.

A cellular communication system makes relatively efficient use of the portion of the electromagnetic spectrum allocated thereto upon which to define communication channels. The infrastructure of a cellular communication system includes a plurality of fixed-site base stations which are installed at spaced-apart locations throughout a geographical area. Because of the positioning of the base stations, only relatively low

power signals are needed to be transmitted to effectuate communications with a mobile station. By transmitting relatively low-power signals, the same frequencies can be reused at different locations throughout the geographical area in which the network infrastructure installed. Communications can be effectuated between more than one set of sending and receiving stations concurrently at separate locations throughout the area encompassed by the cellular communication system.

10 In an ideal communication system, data, communicated by the sending station, is communicated distortion-free upon a communication channel to the receiving station. When the data is received at the receiving station, the data is substantially identical in value to the  
15 corresponding data when transmitted by the sending station. However, in a non ideal communication system in which the data is communicated upon a non ideal communication channel, the data, when received at the receiving station, is dissimilar to the corresponding  
20 values of the data when sent by the sending station. Distortion of the data caused by transmission of the data upon the non ideal communication channel causes such dissimilarities to result. If the distortion is significant, the informational content of the signal  
25 cannot be recovered at the receiving station.

The communication channel might be of characteristics which distort the value of the information bearing bits forming the data which is communicated upon the communication channel to the  
30 receiving station. Fading, such as that caused by multipath transmission or Rayleigh fading, alters the data during its transmission. Such distortion, if not corrected, reduces the communication quality levels in a communication session formed between the sending and the  
35 receiving stations.

Various techniques are utilized to overcome distortion introduced upon the data as a result of transmission upon a non ideal communication channel.

Time-encoding of the data, prior to its  
5 transmission, for instance, increases the redundancy of the transmitted data. By increasing the time redundancy of the data, the likelihood of the informational content of the data being recoverable, once received at the receiving station, is increased. Increasing the time  
10 redundancy of the data is sometimes referred to as creating time diversity.

Adaptive modulation is also sometimes utilized. In an adaptive modulation technique, the manner by which the data is modulated is selected responsive to the channel  
15 conditions of the communication channel upon which the data is to be communicated. That is to say, the modulation scheme utilized by which to modulate the data is selected according to the channel conditions. High-order modulations are utilized with little, or no, coding  
20 when the channel conditions are good. Conversely, low-order modulation schemes with maximum coding are utilized when the channel conditions are poor. Determination of the channel conditions are made through, for instance, evaluation of measured signal-to-noise ratios (SNRs).

25 The range of possible values of the SNR is partitioned into a number of fading regions. A specific modulation scheme or a specific coding scheme, or a combination of both, is assigned to each region. Selection of the boundaries between regions is important,  
30 as the boundaries define which modulation and/or coding schemes are utilized to overcome the non ideal channel conditions. The region boundaries shall herein be referred to as switching thresholds as switching between modulation parameters such as the modulation-type and  
35 coding-type switch at such boundaries.

In the aforementioned co-pending patent application of Serial No. 09/751,640, an artificial intelligence learning scheme is utilized to optimize the switching thresholds so as to maximize the data throughput (TP) of the communication of the data from the sending station to the receiving station. With further communication of the data, the long-term data throughput is continuously monitored and values derived therefrom are used as a referee to train the artificial intelligence learning scheme. A manner is thereby disclosed by which to facilitate maximization of data throughput upon a non ideal communication channel.

The use of additional performance criteria, in addition to data throughput, might additionally be utilized in the selection of switching thresholds.

It is in light of this background information related to communication systems which utilize adaptive modulation schemes that the significant improvements of the present invention have evolved.

## SUMMARY OF THE INVENTION

The present invention, accordingly, advantageously provides apparatus, and an associated method, by which to facilitate selection of a modulation parameter by which  
5 to operate upon data to be communicated by a sending station which utilizes adaptive modulation techniques.

Through operation of an embodiment of the present invention, dynamic selection of a switching threshold is performed. The switching threshold is used to end the  
10 selection of the modulation parameter as the switching threshold defines the boundaries between regions at which different modulation parameters are utilized.

The switching threshold is selected responsive to a constrained optimization scheme in which two, or more,  
15 performance criteria defined of communication characteristics are used in the selection of the switching threshold. Selection is made, e.g., to optimize one of the communication characteristics while also ensuring that at least one additional communication  
20 characteristic is at least fulfilled.

Dynamic selection of the switching threshold permits corresponding dynamic selection of a modulation parameter by which to operate upon data pursuant to an adaptive modulation technique. Improved quality of communications  
25 is facilitated as a result of the dynamic selection process. And, as the switching threshold is selected responsive to satisfaction of multiple performance criteria, a constrained optimization criteria facilitates further improved communication quality levels of  
30 communications.

Quality of service levels are, of course, dependent upon many criteria, and satisfaction of additional performance criteria are often needed in order to satisfy a particular quality of service level.



Implementation of an embodiment of the present invention utilizes, for instance, stochastic computing elements, formed of basic logic gates. Other synthesis automata can alternately be utilized. Implementation is  
5 effectuated at a transmitter as part of an adaptive modulation selector.

In another aspect of the present invention, the constrained optimization of the performance criteria optimizes throughput (TP) while maintaining an error rate  
10 indicia within an allowable level. As the throughput and error rate indicia changes, the constrained optimization scheme results in alteration of the threshold level used to select the modulation parameter upon which data is operated.

15 In another aspect of the present invention, an enhanced linear-reward-inaction (LRI) learning algorithm is provided and used to provide an adaptive switching threshold to be used in the selection of a modulation parameter, such as a modulation-type or an encoding  
20 complexity level. The enhanced LRI learning algorithm is coupled to receive indicia representative of an error rate indicia and a throughput indicia and utilizes such values as a joint referee for the enhanced LRI learning algorithm.

25 More than one adaptive switching thresholds are determinable. Each of the separate switching thresholds defines a boundary region defining different modulation parameters. Thereby, an adaptive modulation scheme can utilize, selectably, several different modulation  
30 parameters depending upon communication characteristics of a communication channel upon which data is to be communicated. When communication conditions worsen, the modulation parameter is selectably changed so that the data is better able to be communicated upon the  
35 communication channel in a manner to permit its

subsequent recovery at a receiving station which receives the communicated data. Conversely, when the communication conditions upon the communication channel improve, the modulation parameters are selectably altered, responsive to positioning upon one, or the other, side of a switching threshold, thereby to improve the rate at which the data is communicated. Because the switching thresholds are adaptively selected responsive to communication characteristics of the communication channel, as communication conditions change, the switching threshold is adaptively altered, thereby to permit redefinition of the region boundaries.

In another aspect of the present invention, signal-to-noise ratios (SNRs) of data communicated upon a communication channel are determined, and the switching thresholds are defined in terms of SNR values. Adaptive alteration of the switching threshold is made responsive to the evaluation of the constrained optimization parameters. As indicated SNR values change, the modulation parameter is correspondingly changed. Thereby, as the communication characteristics, indicated by the measured SNR values, change, the complexities of the operations performed upon the data are selectively altered.

In one implementation, a manner is provided by which to facilitate selection of a switching threshold used pursuant to operation of an adaptive modulation selector of a base transceiver station operable in a cellular communication system. Implementation is permitted, e.g., in any of various, proposed 3G (Third Generation), such as a CDMA 2000 system which provides for 1XTREME data communications. The selected threshold level is adaptively determined, defined in terms of an SNR value. Two, or more, communication characteristics defining performance criteria are utilized in the determination of

the switching threshold level. Constrained optimization is performed by which to maximize throughput while maintaining a frame error rate (FER) within a permissible level. The throughput and FER values are feedback, or  
5 other measured, values. Thereby, the level of the switching threshold determined responsive to the constrained optimization evaluation is dynamically determinable. Subsequent selection of the modulation parameter to be utilized by which to operate upon the  
10 data to be communicated is thereby better selectable responsive to actual communication performance.

In these and other aspects, therefore, apparatus, and an associated method, is provided for a communication system having a first communication station operable to  
15 transmit data upon a communication channel susceptible to fading. Dynamic selection of at least a first switching threshold used in selection of a modulation parameter is made. A calculator is coupled to receive indications of a selected communication indicia associated with  
20 communication characteristics of the communication channel during a selected interval. The calculator selects the at least the first switching threshold. The first switching threshold is selected by the calculator to at least satisfy a first performance criteria and also  
25 to satisfy at least a second performance criteria.

A more complete appreciation of the present invention and the scope thereof can be obtained from the accompanying drawings which are briefly summarized below, the detailed description of the presently preferred  
30 embodiments of the invention, and the appended claims.

## BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 illustrates a functional block diagram of a communication system in which an embodiment of the present invention is operable.

5        Figure 2 illustrates a graphical representation of several exemplary, adaptive switching thresholds selected during operation of an embodiment of the present invention and utilized in the selection of a modulation parameter at the communication station forming a portion  
10 of the communication system shown in Figure 1.

Figure 3 illustrates a graphical representation of exemplary throughput (TP), frame error rate (FER) and frames per burst (FPB) values plotted as functions of an exemplary switching threshold.

15        Figure 4 illustrates a method flow diagram listing the method steps of the method of operation of an embodiment of the present invention.

## DETAILED DESCRIPTION

Referring first to Figure 1, a communication system, shown generally at 10, provides for radio communications with a mobile station, such as the mobile station 12. In the exemplary implementation, the communication system is representative of any of various, proposed 3G (Third Generation) cellular communication systems, such as a CDMA2000 system which provides for 1XTREME data communications. The communication system is also representative of any of many other types of communication systems. While the following description shall describe operation of the communication system 10 with respect to its exemplary implementation as a 3G cellular communication system, in other implementations, operation of an embodiment of the present invention can analogously be described with respect to its implementation in another type of communication system. And, while operation of an embodiment of the present invention is described with respect to communications in a downlink direction, i.e., to the mobile station, operation of an embodiment of the present invention is analogously also operable in an uplink direction, i.e., from the mobile station.

The communication system includes a network portion here including a base transceiver station 14. The base transceiver station communicates with the mobile station by way of a radio link upon which one or more communication channels are defined. The radio link exhibits non-ideal communication characteristics, such as fading characteristics caused by multi path propagation and Rayleigh fading. The characteristics of the channel are time-dependent. That is, the characteristics of the channel defined upon the radio link changes as a function

of time, and the fading, or other, characteristics of the channel are time-varying.

The base transceiver station 14 forms a portion of the radio access network of the communication system.

5 The radio access network includes other functional entities, here including a radio network controller (RNC) 22.

The radio access network is, in turn, coupled to a packet data network (PDN) 26, such as the Internet  
10 backbone, by way of a gateway (GWY) 28. A correspondent device, here represented by a data source 32 is connected to the packet data network, and a communication path is formable between the correspondent device and the mobile station by way of the network portion of the  
15 communication system and the radio link 16. In the exemplary implementation, the data communicated with the communication station is frame-formatted, and communication of the data is effectuated by communicating successive frames between the correspondent device formed  
20 of the data source and the mobile station.

The base transceiver station 14 includes a receive portion 36 and a transmit portion 38. The transmit portion is here shown to include an encoder 42, a modulator 44, and an up-converter/amplifier 46. Data to  
25 be communicated by the base transceiver station upon the radio link 16 is encoded by the encoder at a selected encoding rate, and the encoded data is modulated by the modulator by a selected modulation technique. Thereafter, the encoded and modulated data is up-  
30 converted and amplified by the up-converter and amplifier and provided to an antenna transducer 48 to be transduced thereat and communicated by way of the radio link to the mobile station. Data communicated by the base transceiver station to the mobile station is referred to  
35 as being generated in the downlink direction, and data

originated at the mobile station and transmitted to the base transceiver station is referred to as being transmitted in the reverse link direction. Reverse-link data sent by the mobile station to the base transceiver station is detected at the antenna transducer 48, transduced into electrical form and provided to the receive portion 36 to be operated upon thereat.

The base transceiver station 14 also includes a control portion 52. The control portion is coupled to both the receive and transmit portions of the base transceiver station. The control portion includes an adaptive modulator 54 which selects one or more modulation parameters determinative of the manner by which the transmit portion 38 of the base transceiver station operates upon the data which is to be transmitted therefrom. The lines 56 and 58 extending to the encoder and to the modulator, respectively, are representative of indications of selected encoding rates and indications of selected modulation-types by which the encoder and modulator, respectively, are selected by the adaptive modulator to be operable.

The control portion 52 further includes an enhanced linear-reward-inaction (LRI) learning algorithm element 56 operable to perform calculations, indicated by the calculation function 58 pursuant to an embodiment of the present invention. The enhanced LRI function is coupled to receive inputs, here an indication of a data throughput (TP) on the line 62 and an indication of the frame error rate (FER) on the line 64. The TP and FER values are representative of measured, or calculated, communication characteristics of the communication of data upon the radio link 16. Here, the lines 62 and 64 extend from the receive portion 36 as the TP and FER values are determined at, or provided responsive to information supplied by, the mobile station 12.

The mobile station 12 also includes receive and transmit portions, here designated by the portions 68 and 72. The receive portion 68 is shown also to include a demodulator 74 and a decoder 76. A control portion 78 is  
5 coupled between the receive and transmit portions 68 and 72. When data frames are received at the mobile station, the control portion, amongst other things, operates to determine the number of frames which are in error. Such determinations are made, for instance, through CRC  
10 (cyclic redundancy check) evaluations. Throughput is also determinable by the control portion. Determinations made by the control portion are provided to the transmit portion and returned by way of a reverse link communication to the base transceiver station.

15 When detected by the receive portion 36 of the base transceiver station, such information is extracted and provided to the enhanced LRI function 56. Calculations are performed by the calculator 58 to determine a switching threshold value. In one implementation,  
20 several switching threshold levels are calculated. The switching level thresholds are calculated according to a constrained optimization scheme. In the exemplary implementation, the constrained optimization scheme selects a switching threshold level to maximize  
25 throughput while maintaining the frame error rate with selected levels. As the values of TP and FER change, the value of the switching threshold level also changes in conformity with compliance with the constrained optimization scheme. Thereby, the switching threshold  
30 level is adaptively determined.

Indications of the selected switching threshold levels are provided to the adaptive modulator, here by way of the line 82. The adaptive modulator makes use of the switching threshold level to determine the modulation  
35 parameter, or parameters, generated on the lines 56 and



58. As the switching threshold level is adaptively alterable, the modulation parameters selected by the adaptive modulator correspondingly are adaptively alterable. Thereby, depending upon the communication  
5 conditions upon the radio link 16, the modulation parameters are better selected to facilitate the best level of communications, i.e., the highest throughput levels while maintaining frame error rates within acceptable levels.

10 The adaptive modulator 54 is coupled to receive indications of an SNR value, here applied by way of the line 84. The SNR value is compared together with the switching threshold level and, responsive to the comparison, the adaptive modulator selects the modulation  
15 parameters to be used by the transmit portion 38 of the base transceiver station.

Figure 2 illustrates a graphical representation, shown generally at 92 representative of exemplary operation of the enhanced LRI function and adaptive  
20 modulator forming a portion of the communication system shown in Figure 1. Here, three switching threshold levels, switching threshold level 94, switching threshold level 96, and switching threshold level 98, are plotted along an SNR axis 102. The switching threshold levels  
25 define separate regions, here regions 102, 104, and 106 bounded by the switching threshold levels. Each of the regions 102, 104, and 106 have associated therewith modulation parameters. When an SNR value is applied to the adaptive modulator by way of the line 84 (shown in  
30 Figure 1), the region associated with the SNR value is determinative of the modulation parameter by which the data is operated upon by the transmit portion of the base transceiver station.

Arrows 108 positioned beneath the switching  
35 threshold levels 94, 96, and 98 are representative of the

adaptive nature of the switching thresholds. As the switching thresholds are determined responsive to a constrained optimization scheme, the values of the switching threshold levels are correspondingly altered together with changes in the parameters which define the constrained optimization scheme. By changing the values of the switching threshold levels, the boundaries which define respective ones of the regions 102, 104, and 106 are correspondingly altered. As the adaptive modulator 54 (shown in Figure 1) selects modulation parameters responsive to in which region that the SNR value of data communicated upon the communication channel falls, the modulation parameters selected by the adaptive modulator are also dependent upon the defined regions, as set by the switching threshold levels.

Figure 3 illustrates a graphical representation, shown generally at 112, representative of the relationship between a data throughput (TP) rate and a switching threshold level. Here, normalized values of the throughput are plotted as a function of a switching threshold level value to form the curve 114, normalized frame error rates are plotted as a function of the switching threshold value to form the curve 116, and normalized values of frames per burst are plotted as a function of switching threshold levels to form the curve 118. The throughput is defined as:  $TP = (1-FER) * FPB$ .

Analysis of the curves 114, 116, and 118 indicates that the respective TP, FER, and FPB values are dependent upon the level of the switching threshold. That is to say, as the level of the switching threshold changes, i.e., is adaptively altered responsive to maintenance of a constrained optimization scheme, the resulting values of TP, FER, and FPB change.

For instance, when the level of the switching threshold is low, large values of FER are exhibited.

And, as the level of the switching threshold increases, the value of the FER decreases.

In exemplary implementation, the encoder 42 of the transmit portion 38 of the base transceiver station shown in Figure 1 exhibits a constraint length of  $K = 9$  and an encoding rate  $R = \frac{1}{2}$ . A data frame communicated by the base transceiver station is of a 184 bit length, adding eight tailing bits such that an encoded frame is of a 384 symbol length. The modulator 44 in the exemplary implementation modulates the encoded data applied thereto using either QPSK, 16 QAM, or 64 QAM modulation techniques. Hence, during a frame burst, either one, two, three frames of data are sent upon the radio link, depending upon which of the modulation schemes are utilized.

The adaptive modulator 54 monitors instantaneous fading channel gain of the radio link 16 at the beginning of each frame burst and also the number of error frames in a preceding burst. The number of error frames in the preceding burst is used in conjunction with the number of frames transmitted to estimate the frame error rate, the frames transmitted per burst, and the throughput. The modulator 54 selects the appropriate modulation scheme in a frame burst-by-frame burst basis according to the instantaneous channel gain, so as to maximize the long term average TP subject to a target FER limit.

Further, with respect to the switching threshold levels selected by the enhanced LRI function, three switching threshold levels are determined. The switching threshold levels define, therefore, a first region extending between no transmission to QPSK modulation, a second region extending between QPSK and 16 QAM modulation, and a third region defining 16 QAM modulation to 64 QAM modulation. In contrast to a conventional adaptive modulation controller, the

switching threshold levels 94, 96, and 98 are here adaptively altered pursuant to the constrained optimization scheme. The enhanced LRI function provides a self-learning manner by which to select the switching  
5 threshold levels which does not utilize expressions of throughput and the thresholds, nor does the manner make assumptions with respect to the operating environment of the communications. A class of learning techniques, namely, stochastic learning automata, is utilized.

10 In this approach, an automaton output is regarded as a set of switching threshold levels. That is, the thresholds are partitioned into a number of combinations, and the number of combinations are equal to the number of automaton output actions. The task of the automaton is  
15 to choose an action which gives a best performance function. The environment represents the operating environment of the modulation selector. The automaton uses a learning algorithm to update the output probability vector to govern a choice of switching  
20 thresholds. An LRI algorithm function successfully converges to the best action that gives the maximum TP. A manner is provided by which to estimate the FER, FPB, and TP values for the purposes of training up the automaton. And, an enhanced LRI function is provided  
25 which accepts a joint referee and performs optimization under a constraint.

Figure 4 illustrates a method, shown generally at 122 representative of the method of operation of the method of an embodiment of the present invention. The  
30 method dynamically selects at least a first switching threshold used in selection of a modulation parameter.

First, and as indicated by the block 124, at least a first switching threshold is selected responsive to indications of a selected communication indicia  
35 associated with communication characteristics of a

communication channel during a selected interval. The switching threshold is selected to at least satisfy a first performance criteria and to satisfy at least a second performance criteria. Then, and as indicated by  
5 the block 126, the modulation parameter is selected by which the data is operated upon by the first communication station prior to transmission upon the communication channel.

Thereby, a manner is provided by which to select a  
10 threshold level responsive to a constrained optimization scheme and, thereafter, select a modulation parameter responsive to values of the selected threshold level.

The previous descriptions are of preferred examples for implementing the invention, and the scope of the  
15 invention should not necessarily be limited by this description. The scope of the present invention is defined by the following claims.

What is claimed:

1. In a communication system having a first communication station operable to transmit data upon a communication channel susceptible to fading, an improvement of apparatus for dynamically selecting at least a first switching threshold used in selection of a modulation parameter, said apparatus comprising:
  - a calculator coupled to receive indications of a selected communication indicia associated with communication characteristics of the communication channel during a selected interval, said calculator for selecting the at least the first switching threshold, the first switching threshold selected by said calculator to at least satisfy a first performance criteria and to satisfy at least a second performance criteria.
2. The apparatus of claim 1 wherein selection of the first switching threshold by said calculator maximizes the first performance criteria while also satisfying the at least the second performance criteria:
3. The apparatus of claim 1 wherein the selected communication indicia to which said calculator is coupled to receive indications thereof comprises error indicia representative of errors introduced upon the data during communication upon the communication channel.
4. The apparatus of claim 3 wherein the data comprises frame-formatted data and wherein the error indicia to which said calculator is coupled to receive comprises a frame error rate (FER) indication.

5. The apparatus of claim 1 wherein the data transmitted by the first communication station is transmitted to a second communication station, wherein the second communication station is coupled in a feedback arrangement with the first communication to return to the first communication station a report representative of the communication characteristics of the communication channel, and wherein the selected communication indicia to which said calculator is coupled to receive is based upon the report returned to the first communication station.

6. The apparatus of claim 5 wherein the data transmitted by the first communication station is formatted into a plurality of data frames which are successively transmitted upon the communication channel, the plurality including a previously-transmitted data frame and a subsequent data frame, the report returned to the first communication station subsequent to reception of the previously-transmitted frame and wherein the first switching threshold selected by said calculator is selected, and the modulation parameter selected therefrom is selected, prior to transmission of the subsequent data frame by the first communication station.

7. The apparatus of claim 6 wherein the selected communication indicia to which said calculator is coupled to receive indications thereof comprises throughput indicia representative of a throughput rate at which the plurality of data frames are transmitted on the communication channel.

8. The apparatus of claim 7 wherein the selected communication indicia to which said calculator is coupled to receive indications thereof further comprises a frame error rate (FER) indication, the throughput rate being  
5 negatively related to the FER indication.

9. The apparatus of claim 1 further comprising a modulation parameter selector coupled to said calculator, said modulation parameter selector for selecting the modulation parameter by which the data is operated upon  
10 by the first communication station prior to transmission upon the communication channel.

10. The apparatus of claim 9 wherein the modulation parameter comprises a modulation-type by which the data is modulated by the first communication station.

15 11. The apparatus of claim 9 wherein the modulation parameter comprises an encoding rate by which the data is encoded by the first communication station.

12. The apparatus of claim 1 wherein the first communication station comprises a processor and wherein  
20 said calculator comprises an algorithm executable at the processor.

13. The apparatus of claim 12 wherein said calculator comprises a enhanced linear-reward-inaction (LRI) learning algorithm in which the selected  
25 communication indicia form inputs to the LRI algorithm.



14. The apparatus of claim 13 wherein the inputs formed of the selected communication indicia comprise teaching inputs to the LRI.

15 15. The apparatus of claim 14 wherein the teaching inputs comprise an indication related to the first performance criteria and an indication related to the second performance criteria.

16. In a method for communicating in a communication system having a first communication station  
10 operable to transmit data upon a communication channel susceptible to fading, an improvement of apparatus for dynamically selecting at least a first switching threshold used in selection of a modulation parameter, said apparatus comprising:

15 selecting the at least the first switching threshold responsive to indications of a selected communication indicia associated with communication characteristics of the communication channel during a selected interval, the first switching threshold selected  
20 to at least satisfy a first performance criteria and to satisfy at least a second performance criteria; and


selecting the modulation parameter by which the data is operated upon by the first communication station prior to transmission upon the communication channel.

25 17. The method of claim 16 wherein the first switching threshold selected during said operation of selecting the at least the first switching threshold maximizes the first performance criteria while also satisfying the at least the second performance criteria.

18. The method of claim 16 wherein the first communication station comprises a processor and wherein said operation of selecting the at least the first switching threshold is performed by executing an  
5 algorithm at the processor.

19. The method of claim 18 wherein the algorithm comprises a enhanced linear-reward-inaction (LRI) learning algorithm in which the selected communication indicia form inputs to the LRI algorithm.

10 20. The method of claim 19 wherein the inputs to the LRI algorithm comprise a first indication related to the first performance criteria and a second indication related to the second performance criteria.

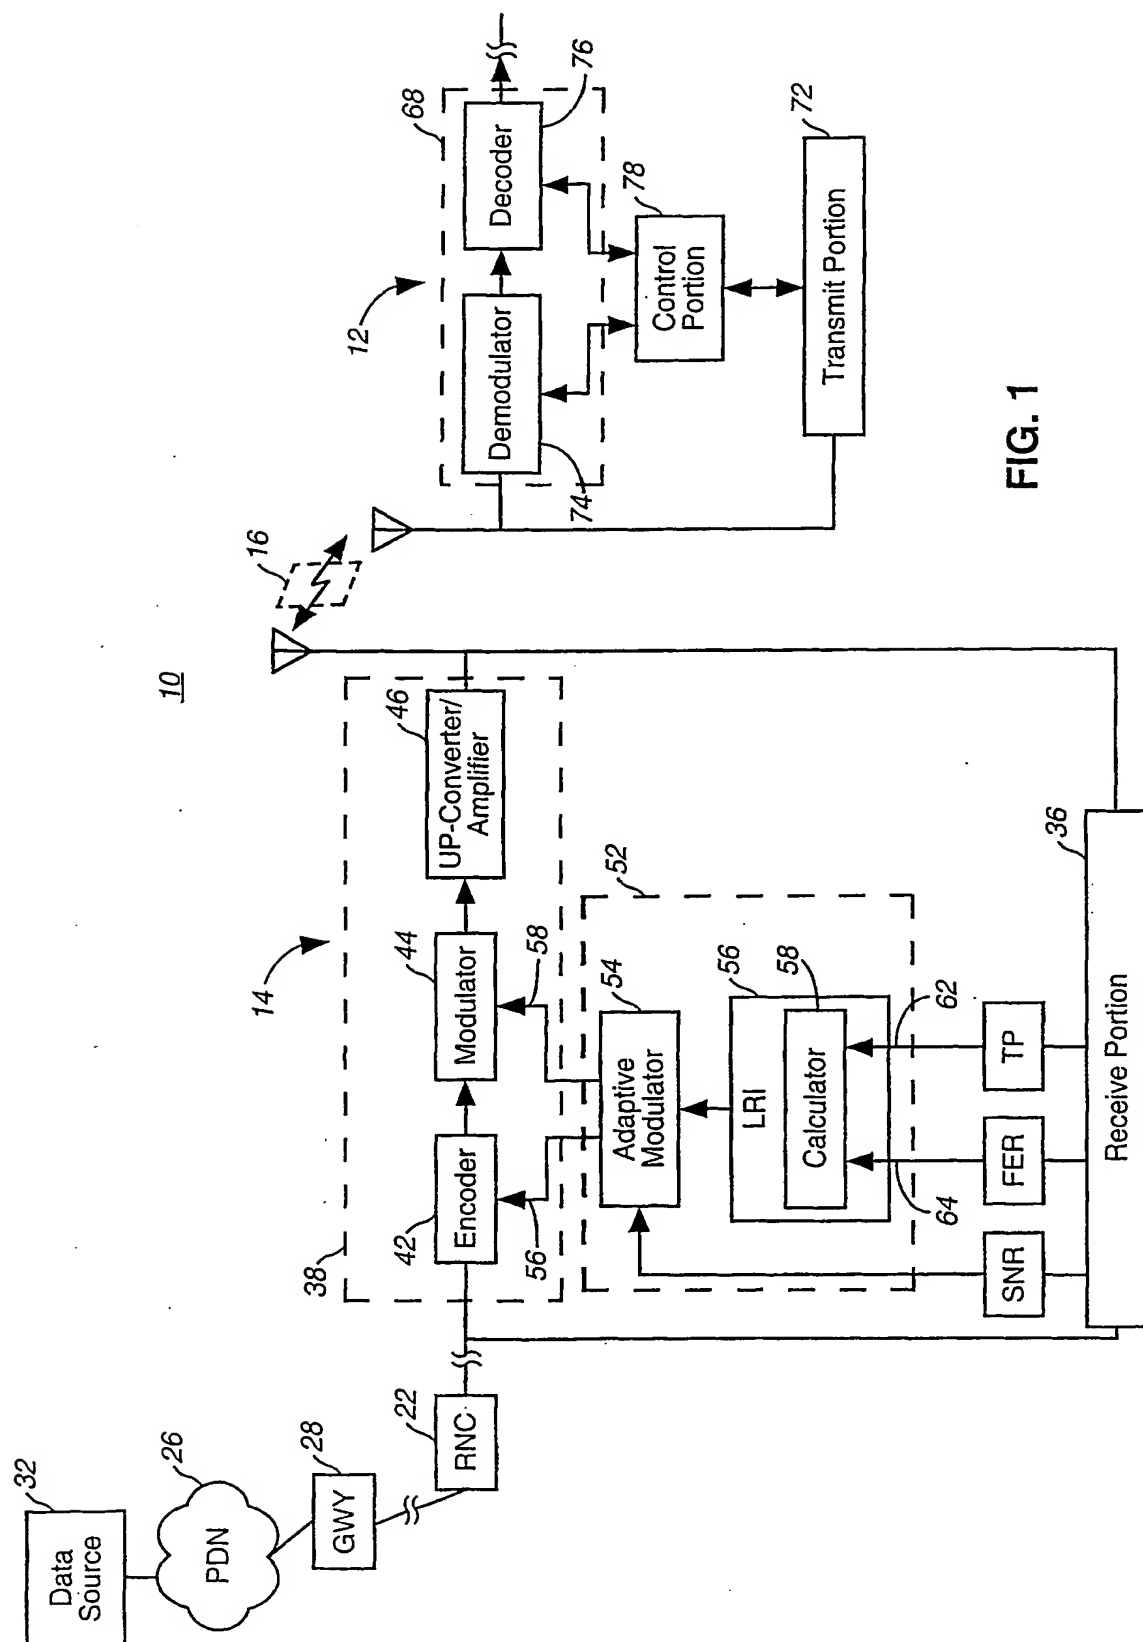

**FIG. 1**

2/3

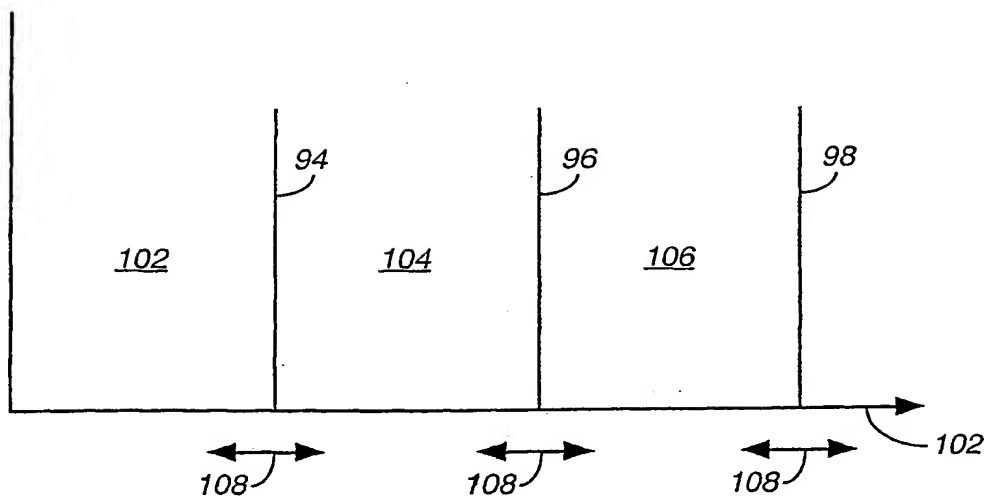


FIG. 2


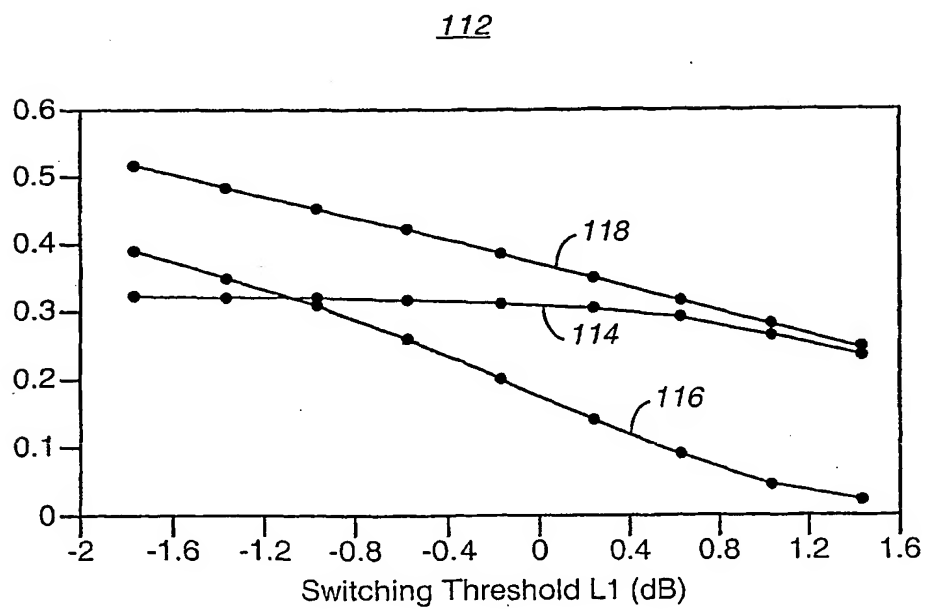


FIG. 3

3/3

**FIG. 4**

(19) World Intellectual Property Organization  
International Bureau

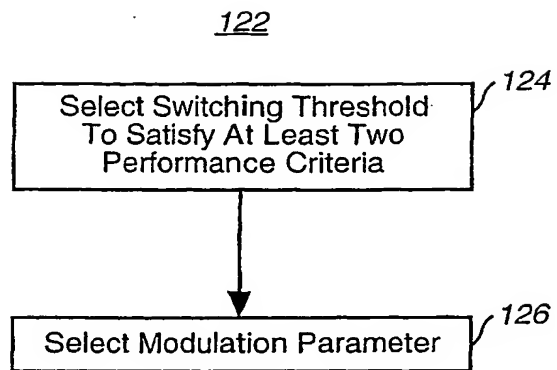

(43) International Publication Date  
6 June 2002 (06.06.2002)


PCT

(10) International Publication Number  
WO 02/045274 A3

- (51) International Patent Classification<sup>7</sup>: H04L 1/00 (74) Agents: KELLY, Robert, H. et al.; Novakov Davis & Munck, P.C., 900 Three Galleria Tower, 13155 Noel Road, Dallas, TX 75240 (US).
- (21) International Application Number: PCT/IB01/02189
- (22) International Filing Date: 20 November 2001 (20.11.2001) (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
60/250,242 30 November 2000 (30.11.2000) US  
09/751,640 29 December 2000 (29.12.2000) US  
09/901,988 10 July 2001 (10.07.2001) US
- (71) Applicant: NOKIA CORPORATION [FI/FT]; Keilalahdentie 4, FIN-02150 Espoo (FI).
- (71) Applicant (for LC only): NOKIA INC. [US/US]; 6000 Connection Drive, Irving, TX 75039 (US).
- (72) Inventor: TANG, Clive; Apartment 2238, 145 Cimarron Trail, Irving, TX 75063 (US).
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— with international search report

[Continued on next page]

(54) Title: APPARATUS, AND ASSOCIATED METHOD, FOR SELECTING A SWITCHING THRESHOLD FOR A TRANSMITTER UTILIZING ADAPTIVE MODULATION TECHNIQUES

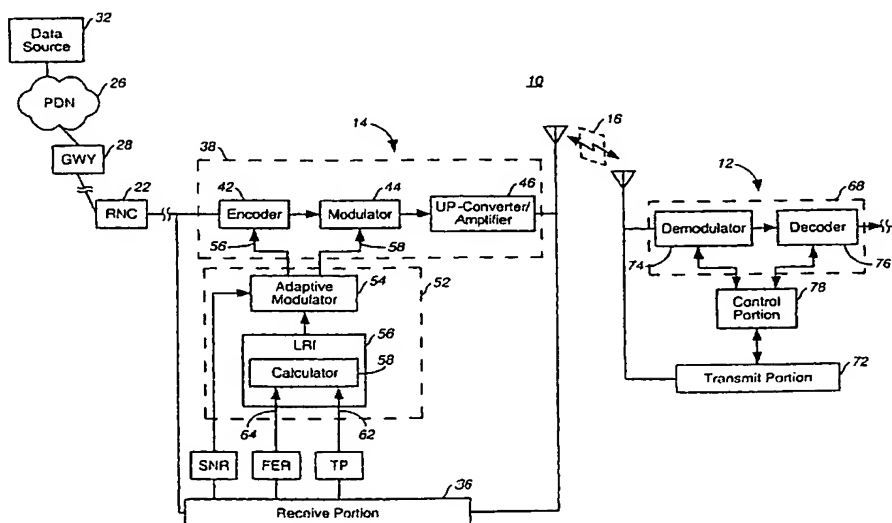

(57) Abstract: Apparatus (52), and an associated method selects an adaptive switching threshold level responsive to a constrained optimization scheme. The switching level is selected by an LRI function (56) forming a portion of a transmitting station (14), such as a base transceiver station (14) operable in a cellular communication system (10). The switching threshold level is utilized in the selection by an adaptive modulator (54) of a modulation parameter by which data transmitted by the transmitting station (14) is encoded or modulated.

WO 02/045274 A3



(88) Date of publication of the international search report:  
31 October 2002

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## INTERNATIONAL SEARCH REPORT

 International Application No  
 PCT/IB 01/02189

 A. CLASSIFICATION OF SUBJECT MATTER  
 IPC 7 H04L1/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

 Minimum documentation searched (classification system followed by classification symbols)  
 IPC 7 H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC, COMPENDEX

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	LAU V K N: "PERFORMANCE OF VARIABLE RATE BIT INTERLEAVED CODING FOR HIGH BANDWIDTH EFFICIENCY" VTC 2000-SPRING, 51ST VEHICULAR TECHNOLOGY CONFERENCE PROCEEDINGS. TOKYO, JAPAN, vol. 3 OF 3. CONF. 51, 15 - 18 May 2000, pages 2054-2058, XP000968365 ISBN: 0-7803-5719-1 * section 3.2 *	1-20
A	US 5 699 365 A (KLAYMAN JEFFREY T ET AL) 16 December 1997 (1997-12-16) column 7, line 50 - line 60	1-20
A	EP 0 963 074 A. (FUJITSU LTD) 8 December 1999 (1999-12-08) paragraphs '0036!, '0037!	1-20
	--- -/-	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*&\* document member of the same patent family

Date of the actual completion of the international search

19 July 2002

Date of mailing of the international search report

30/07/2002

Name and mailing address of the ISA

 European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax: (+31-70) 340-3016

Authorized officer

Ghigliotti, L



## INTERNATIONAL SEARCH REPORT

International Application No

PCT/IB 01/02189

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>CHANDRAMOULI R ET AL: "Rate control for a video coder using learning automata" SYSTEMS, MAN, AND CYBERNETICS, 1998. 1998 IEEE INTERNATIONAL CONFERENCE ON SAN DIEGO, CA, USA 11-14 OCT. 1998, NEW YORK, NY, USA, IEEE, US, 11 October 1998 (1998-10-11), pages 4630-4635, XP010311155 ISBN: 0-7803-4778-1 * section 2 *</p>	13-15, 19,20

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/IB 01/02189

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
US 5699365	A	16-12-1997	CN	1185872 A	24-06-1998
			EP	0829144 A1	18-03-1998
			GB	2315393 A ,B	28-01-1998
			KR	263139 B1	01-08-2000
			WO	9736377 A1	02-10-1997
<hr/>					
EP 0963074	A	08-12-1999	JP	11355373 A	24-12-1999
			EP	0963074 A2	08-12-1999
<hr/>					